


0710 KSS 扣式護線套 Snap Bushing



材質： UL 合格之 NYLON 66（黑色）防火等級 94V-2。

用途： 使粗劣的鐵孔變成圓滑的出線孔。 各種電線電纜之保護及絕緣。

用法： 不需工具，只要用手輕輕一壓，即可完成裝配。適用 3.2mm 以下之鐵板。

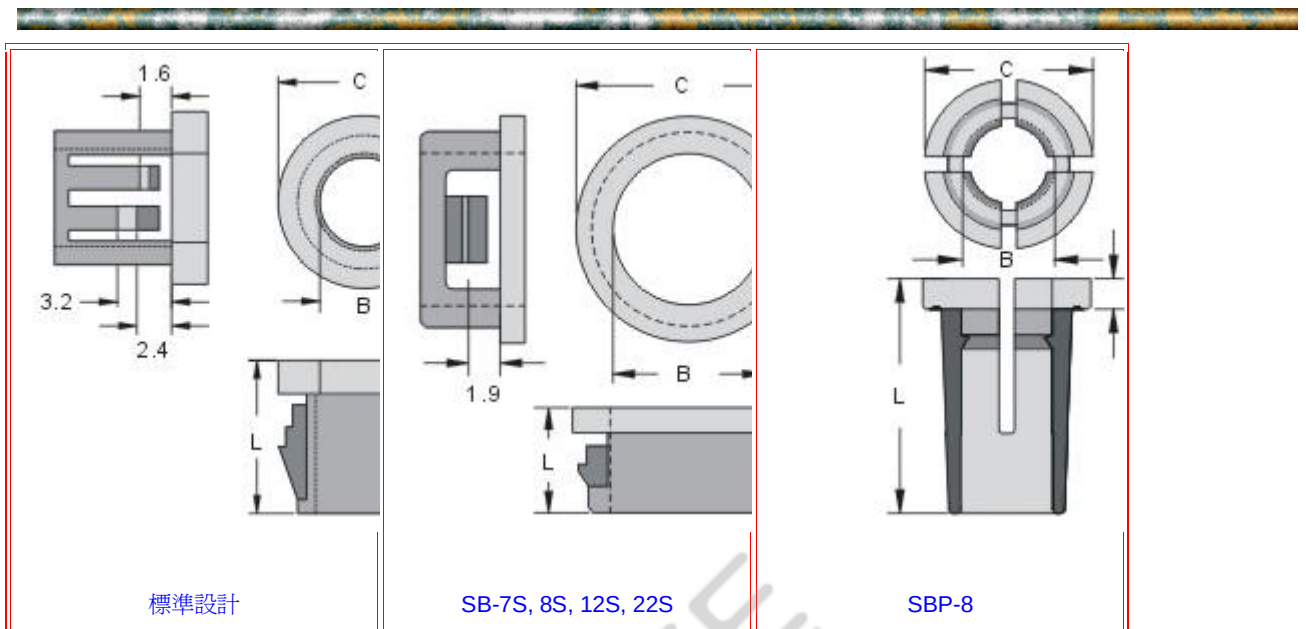

※ SB-8A 適用 2.2mm 以下之鐵板。

※ SB-8 適用 1.6mm 以下之鐵板。

單位：mm

型 號 Item No.	鐵板孔徑 Mounting Hole	最大出線孔 B	覆蓋 C	高度 L	T	包裝 Packing
-----------------	-----------------------	------------	---------	---------	---	---------------

		mm	inch					
	 SB-7S	7.1	9/32"	5.8	8.8	6.1	1.3	100 pcs / 包
	 SB-8S	7.9	5/16"	6.8	9.8	6.0	1.5	
	 SB-12S	11.9	15/32"	9.2	13.7	6.3	1.5	
	 SB-22S	22.2	7/8"	19.6	24.0	6.5	1.5	
	 SB-8A	7.9	5/16"	5.1	10.5	8.0	1.6	
	 SB-8	7.9	5/16"	5.8	10.5	8.0	1.6	
	 SBP-8	7.4		5.9	10.8	15.0	2.0	
	 SB-10	9.5	3/8"	6.4	12.0	10.3	1.6	
	 SB-10M	9.5	3/8"	7.8	13.0	10.5	1.6	
	 SB-13	12.7	1/2"	8.0	15.0	10.3	1.6	
	 SB-14	14.3	9/16"	11.4	17.0	10.3	1.5	
	 SB-16	15.9	5/8"	12.7	18.6	10.3	1.6	
	 SB-19	19.1	3/4"	14.3	21.7	10.3	1.6	
	 SB-19M	19.1	3/4"	15.8	21.7	10.3	1.6	
	 SB-20	20.0		15.9	22.4	10.0	1.4	
	 SB-22	22.2	7/8"	17.5	24.2	11.5	1.6	
	 SB-22M	22.2	7/8"	18.9	24.2	11.5	1.6	
	 SB-25	25.4	1"	19.5	28.5	11.7	1.8	
	 SB-26	25.4		19.1	28.5	11.5	1.6	
	 SB-30	30.1	1 3/16"	24.1	33.3	11.5	1.6	
	 SB-32	32.0		23.8	34.6	11.4	1.5	
	 SB-38	38.1	1 1/2"	29.0	42.1	11.4	1.5	
	 SB-45	44.5	1 3/4"	35.4	47.8	11.6	1.5	
	 SB-50	50.8	2"	41.6	54.6	11.8	1.6	

放入選樣單