

Current Transformers


比 流 器

600V 50/60Hz PVC Enclosure (PVC外殼)




01 POS-30R ~ POS-90R

unit: mm

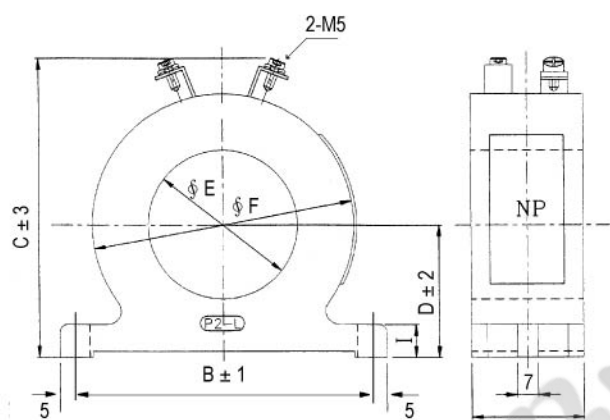


Type 型式	I _p (A) 一次電流	A	B	C	D	Φ E	Φ F	I
POS-30R	≤ 300	36	83	85	38	31	73	11
POS-50R	≤ 500	37	100	100	47	50	88	11
POS-70R	600 - 800	37	120	120	57	70	107.5	11
POS-90R	1000 - 2000	37	145	147	71.5	91	134	13

Type 型式	I _p (A) 一次電流	I _s (A) 二次電流	VA 負擔	CL 精度	lth (In)	App. Kg 概重
POS-30R	≤ 300	5/1	15	3.0	40	0.4
POS-50R	≤ 500	5/1	15	1.0	40	0.5
POS-70R	600 - 800	5/1	15	1.0	40	0.6
POS-90R	1000 - 2000	5/1	40	1.0	40	0.7

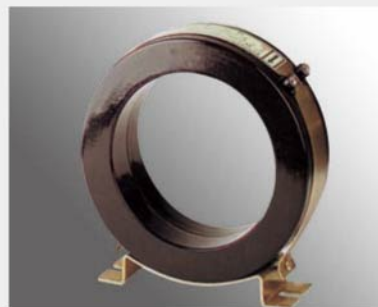

02 PIS-120

unit: mm

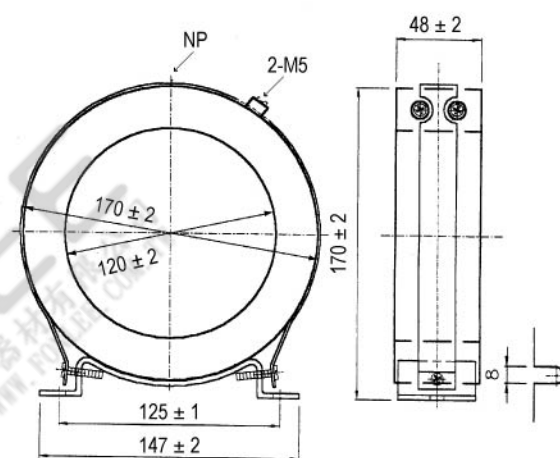

Type 型式	I _p (A) 一次電流	I _s (A) 二次電流	VA 負擔	CL 精度	lth (In)	App. Kg 概重
PIS-120	1500 - 3000	5/1	40	1.0	40	2