

CA-P3, CA-P5, CA-P7, CA-P9

用途

0.66kV
乾式貫穿型
屋內計測用

Usage

0.66kV
Dry Window Type
For Indoor Application (Measuring)

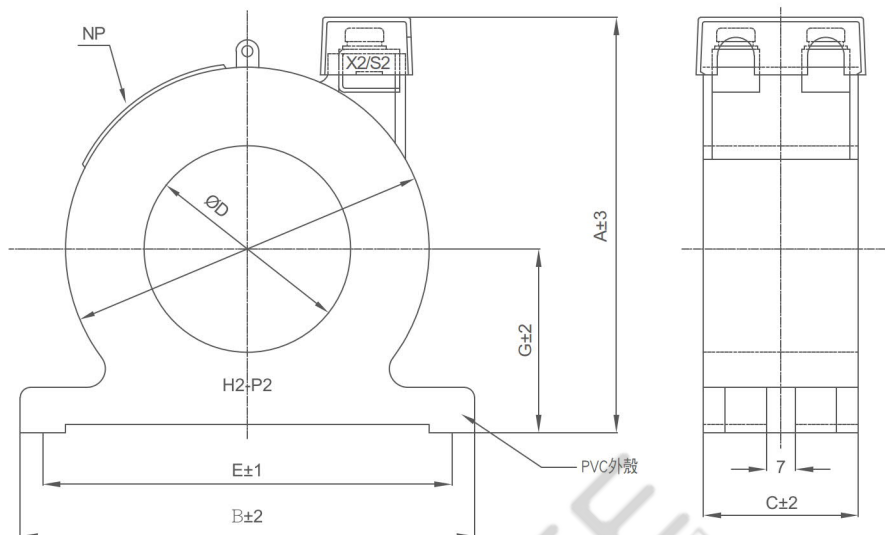


FIG.1 CA-P3579

型號 TYPE	一次電流(A) PRI. CURRENT	貫穿導體數 (T)	二次電流(A) SEC. CURRENT	額定負擔/準確度 RATED OUTPUT & ACCURACY CLASS	過電流 強度 - /1s	重量 (kg) WEIGHT	外觀尺寸(mm) DIMENSION							
							A	B	C	ØD	E	ØF	G	
CA-P3	5	20	5	10VA / 3.0	40	0.4	95	93	37	31	83	73	38	
	10	10												
	15	7												
	20	5												
	30	4												
	40	3												
	50	2												
	60	2												
	75	2												
	100, 125, 150	1												
175, 180, 200	1	15VA 3.0												
CA-P5	225, 250, 300, 350	1	5	15VA 3.0	40	0.48	115	110	37	50	100	88	47	
	400, 500, 600	1												
CA-P7	700, 750, 800	1	5	15VA 3.0	40	0.5	135	130	37	70	120	107.5	57	
CA-P9	900, 1000, 1200, 1250, 1400, 1500, 1600, 2000	1	5	15VA 3.0	40	1.1	160	155	37	91	146	134	71.5	
		1												

依據標準(STANDARD)：CNS 11437、IEC 60044-1。使用頻率(FREQUENCY)：50 / 60Hz。
一次貫穿導體由客戶自行捲繞，表列外其他規格請直接和本公司洽詢。