

CM-2KV

用途

24kV
樹脂鑄造
屋內計測用



Usage

24kV
Epoxy Resin Molded
For Indoor Application
(Measuring)

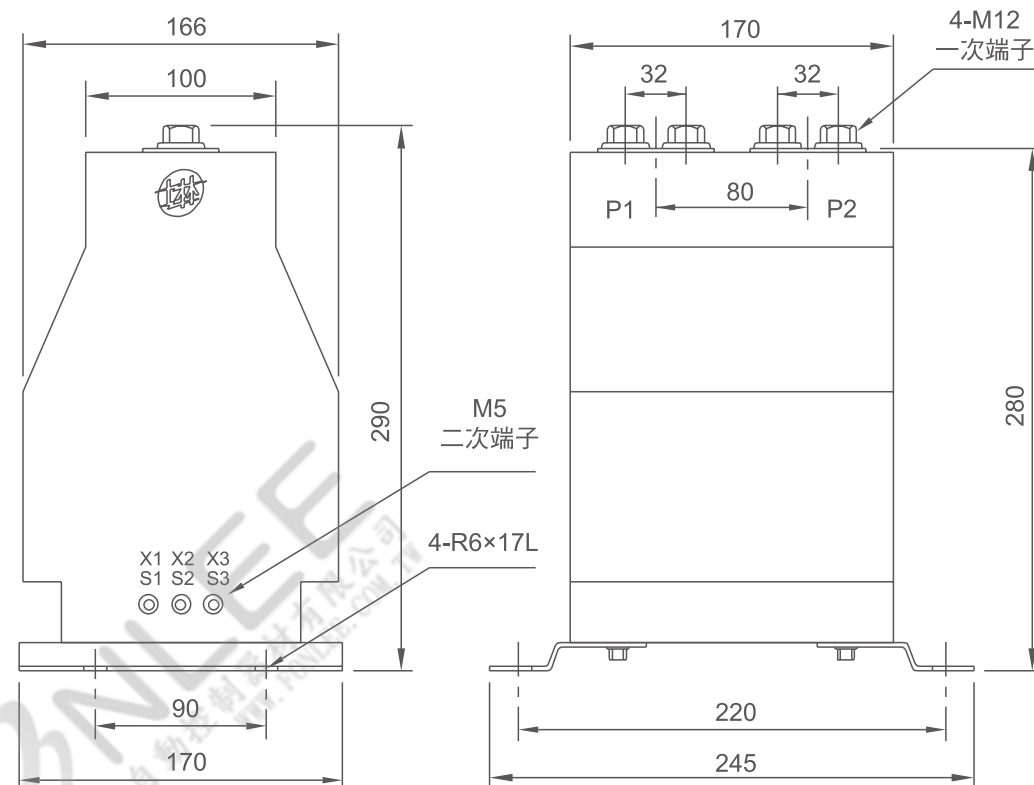


FIG.1 CM-2KV

型號 TYPE	一次電流(A) PRI. CURRENT	二次電流(A) SEC. CURRENT	額定負擔/準確度 RATED OUTPUT & ACCURACY CLASS	過電流 強度 - /1s	重量(kg) WEIGHT	外觀尺寸(mm) DIMENSION
CM-2KV 單比 SINGLE RATIO	5, 10, 20, 25, 30, 40, 50, 60, 75, 100, 120, 150, 200, 250 300, 350, 400, 500, 600, 700, 750, 800, 1000			100In 25kA		
CM-2KV 雙比 DOUBLE RATIO	10-5, 20-10, 30-15, 40-20, 50-25, 60-30, 80-40, 100-50, 120-60, 150-75, 200-100, 250-125 300-150, 400-200, 500-250, 600-300, 800-400, 1000-500	5 1	40VA / 1.0 15VA / 0.5	100In 25kA	15	FIG.1