

EL_A (1Ø)

用途

0.72kV
屋內用
乾式
控制用

Usage

0.72kV
For Indoor Application (Measuring)
Dry Type
For Control

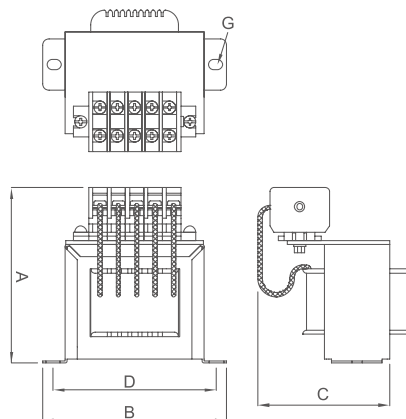


FIG.1

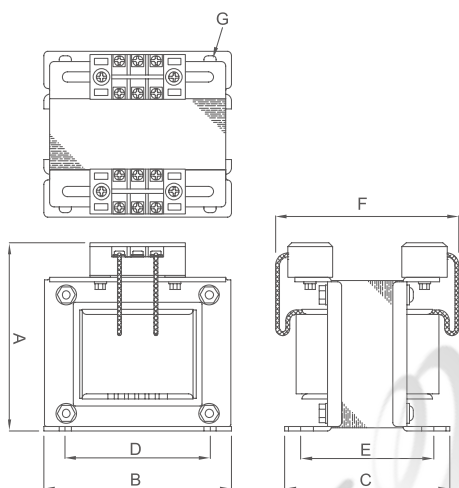


FIG.2

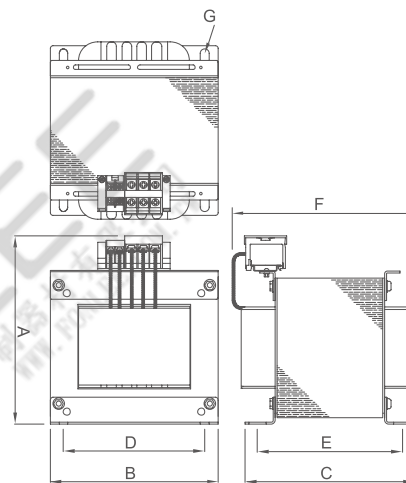


FIG.3

型號 TYPE	一次電壓(V) PRI. VOLTAGE	二次電壓(V) SEC. VOLTAGE	負擔(VA) BURDEN	重量(kg) WEIGHT	圖號 FIG.	外觀尺寸(mm) DIMENSION								
						A	B	C	D	E	F	G(長孔)		
1Ø	EL-PFA	190,220, 380, 400, 440, 460, 480	110, 120, 190, 220, 240	15	0.8	1	86	90	75	79	-	-	Ø5*7L	
	EL-KFA			50	2.0	2	92	92	81	72	65	90	Ø6*12L	
	EL-RFA			75	2.0		92	92	94	72	80	105	Ø6*12L	
				100~120	2.6		102	102	84	80	66	95	Ø6*12L	
	EL-YFA			150	3.2		102	102	94	80	78	105	Ø6*12L	
	EL-ZFA			200	4.5		109	111	100	88	82	120	Ø6*12L	
	EL-NFA			250	4.6		109	111	112	88	90	121	Ø6*14L	
				300	5.6		117	120	112	95	90	121	Ø6*14L	
	EL-DFA			400	5.0		131	138	95	112	74	116	Ø8*15L	
	EL-SFA			500	7.5		131	138	100	112	79	121	Ø8*15L	
	EL-LFA			600	8.3		131	138	120	112	100	141	Ø8*15L	
	EL-FFA			750	9.3		131	138	130	112	110	151	Ø8*15L	
	EL-AFA			1000	12.5		167	168	137	136	110	153	Ø8*18L	
	EL-GFA			1500	18.0		167	168	162	136	135	178	Ø8*18L	
	EL-TFA			2000	23.0		3	208	190	150	160	125	171	Ø10*20L
	EL-3FA			3000	27.0			215	190	190	160	165	211	Ø10*20L
	EL-5FA			5000	52.5			245	228	208	150	179	250	Ø 9 *22L

依據標準(STANDARD)：IEC 60044-2。使用頻率(FREQUENCY)：60Hz。
表列外其它規格請直接和本公司洽詢。