

Product data sheet

Specifications



three-phase network control relay RM4-T - range 300..430 V

RM4TR32

⚠ Discontinued on: 23 January 2021

⚠ Discontinued

Main

Range of Product	Harmony Relay
Product or Component Type	Industrial measurement and control relays
Relay Type	Control relay
Product Specific Application	For 3-phase supply
Relay name	RM4-T
Relay monitored parameters	Phase failure detection Phase sequence Overvoltage and undervoltage detection
Time delay	Adjustable 0.1...10 s
Measurement range	290...484 V
Contacts type and composition	2 C/O
Poles description	3P

Complementary

Maximum switching voltage	440 V AC
Control threshold undervoltage	300...430 V
Control threshold overvoltage	420...480 V
Output contacts	2 C/O
Setting accuracy of the switching threshold	+/-3 %
Switching threshold drift	<= 0.06 % per degree centigrade depending permissible ambient air temperature <= 0.5 % within the measuring range
Setting accuracy of time delay	10 P
Time delay drift	<= 0.07 % per degree centigrade depending on the rated operational temperature <= 0.5 % within the measuring range
Hysteresis	5 % fixed de-energisation threshold
Delay at power up	650 ms
Maximum measuring cycle	80 ms
Marking	CE
Overvoltage category	III IEC 60664-1
[Ui] rated insulation voltage	500 V IEC

Supply frequency	50/60 Hz +/- 5 %
Operating position	Any position without derating
Connections - terminals	Screw terminals, 2 x 1.5 mm²flexible with cable end Screw terminals, 2 x 2.5 mm²flexible without cable end
Tightening torque	5.31...9.74 lbf.in (0.6...1.1 N.m)
Mechanical durability	30000000 cycles
[Ith] conventional free air thermal current	8 A
[Ie] rated operational current	2 A 158 °F (70 °C) 24 V DC-13 IEC 60947-5-1/1991 2 A 158 °F (70 °C) 24 V DC-13 VDE 0660 3 A 158 °F (70 °C) 115 V AC-15 IEC 60947-5-1/1991 3 A 158 °F (70 °C) 115 V AC-15 VDE 0660 3 A 158 °F (70 °C) 24 V AC-15 IEC 60947-5-1/1991 3 A 158 °F (70 °C) 24 V AC-15 VDE 0660 3 A 158 °F (70 °C) 250 V AC-15 IEC 60947-5-1/1991 3 A 158 °F (70 °C) 250 V AC-15 VDE 0660 0.1 A 158 °F (70 °C) 250 V DC-13 IEC 60947-5-1/1991 0.1 A 158 °F (70 °C) 250 V DC-13 VDE 0660 0.3 A 158 °F (70 °C) 115 V DC-13 IEC 60947-5-1/1991 0.3 A 158 °F (70 °C) 115 V DC-13 VDE 0660
Switching capacity in mA	10 mA 12 V
Switching voltage	250 V AC
Contacts material	90/10 silver nickel contacts
Number of cables	2
Height	3.07 in (78 mm)
Width	0.89 in (22.5 mm)
Depth	3.15 in (80 mm)
Terminals description ISO n°1	(15-16-18)OC (L1-L2-L3)CO (25-26-28)OC
Output relay state	Tripped, fault present
9 mm pitches	2.5
Net Weight	0.24 lb(US) (0.11 kg)

Environment

Electromagnetic compatibility	Electrostatic discharge - test level: 6 kV level 3 (contact discharge) conforming to IEC 61000-4-2 Electrostatic discharge - test level: 8 kV level 3 (air discharge) conforming to IEC 61000-4-2 Resistance to electrostatic discharge 6 kV contact) IEC 61000-4-2 level 3 Resistance to electrostatic discharge 8 kV air) IEC 61000-4-2 level 3
Standards	EN/IEC 60255-6
Product Certifications	CSA GL UL
Directives	73/23/EEC - low voltage directive 89/336/EEC - electromagnetic compatibility
Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
Ambient air temperature for operation	-4...149 °F (-20...65 °C)
Relative humidity	15...85 % 3K3 IEC 60721-3-3
Vibration resistance	0.35 ms 10...55 Hz)IEC 60068-2-6
Shock resistance	15 gn 11 ms IEC 60068-2-27
IP degree of protection	IP20 IEC 60529 terminals) IP50 IEC 60529 casing)
Pollution degree	3 IEC 60664-1
Dielectric test voltage	2.5 kV

Non-dissipating shock wave	4.8 kV
Resistance to electrostatic discharge	6 kV contact IEC 61000-4-2 level 3 8 kV air IEC 61000-4-2 level 3
Resistance to electromagnetic fields	9.14 V/m (10 V/m) IEC 61000-4-3 level 3
Resistance to fast transients	2 kV IEC 61000-4-4 level 3
Disturbance radiated/ conducted	CISPR 11 group 1 - class A CISPR 22 - class A

Ordering and shipping details

Category	22376-RELAYS-MEASUREMENT(RM4)
Discount Schedule	CP2
GTIN	00785901481652
Returnability	No
Country of origin	ID

Packing Units


Unit Type of Package 1	PCE
Number of Units in Package 1	1

Contractual warranty

Warranty	18 months
----------	-----------


3-phase Supply Control Relays

Dimensions

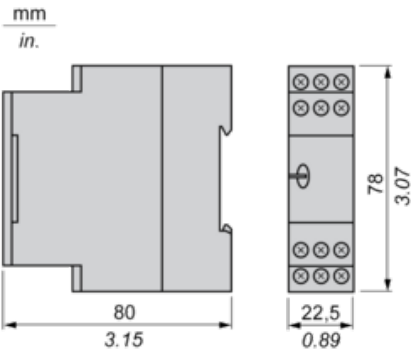


3-phase Supply Control Relays

Rail mounting

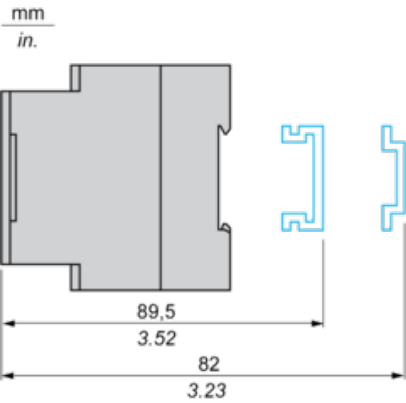


Screw fixing

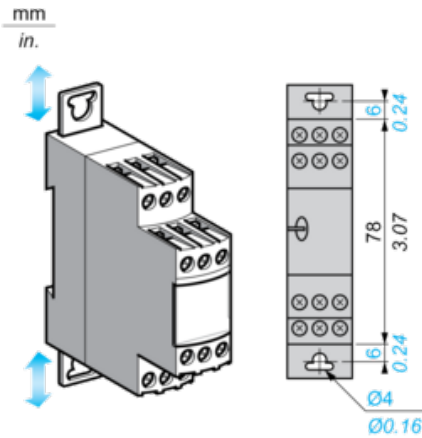

3-Phase Supply Control Relays

Wiring Diagram



L1, L2, L3 Supply to be monitored

15-18, 15-16 1st C/O contact of the output relay

25-28, 25-26 2nd C/O contact of the output relay


Product data sheet

Connections and Schema

RM4TR32

Application Scheme

Example

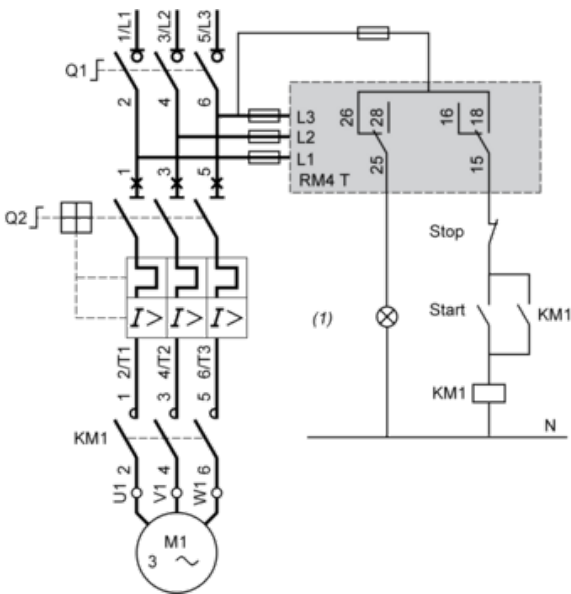


(1) Fault

Electrical Durability and Load Limit Curves

AC Load


Curve 1: Electrical durability of contacts on resistive load in millions of operating cycles

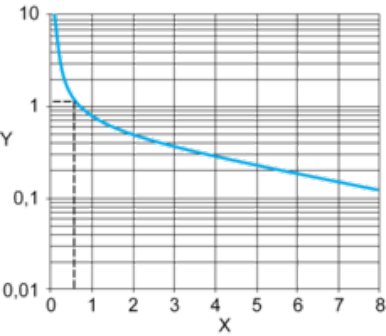

X Current broken in A

Y Millions of operating cycles

Curve 2: Reduction factor k for inductive loads (applies to values taken from durability Curve 1)

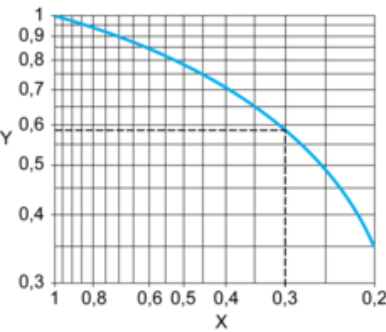


X Power factor on breaking (cos φ)

Y Reduction factor K

DC Load

Load limit curve

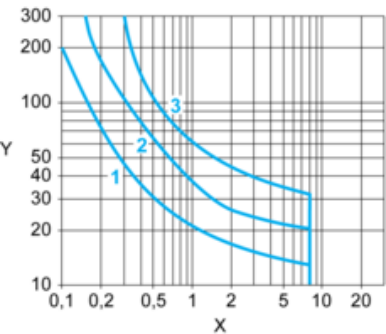


X Current in A

Y Voltage in V

1 L/R = 20 ms

2 L/R with load protection diode


3 Resistive load



Function Diagram

Overvoltage and Undervoltage Detection

Functions "Fault detection delayed" or "Fault detection extended" (by switch selector)

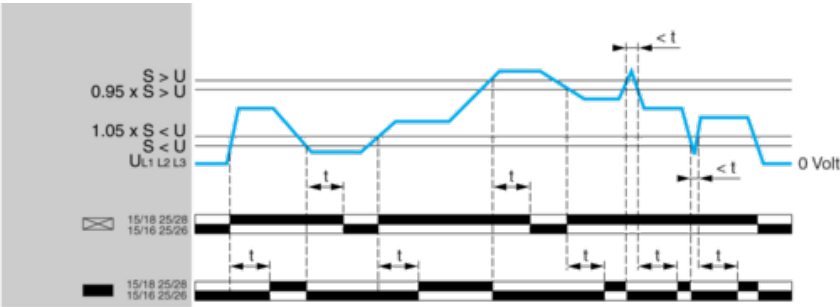

Legend

- t Time delay
- U 3-phase supply voltage monitored
- S Overvoltage or undervoltage setting
- 15/18, 15/16; 25/28, 25/26 Output relays connections
- Relay status: black color = energized.

Recommended replacement(s)

RM4TR32 is replaced by:

1x



3-phase control relay, Harmony Control Relays, 8A, 2CO, 380...480V AC
RM22TR33