
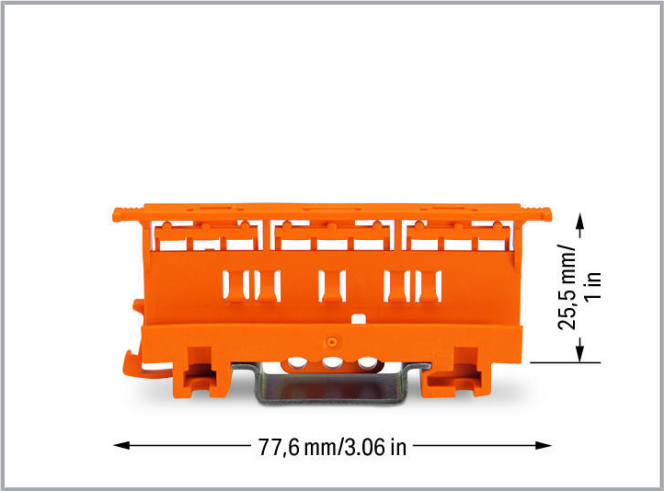


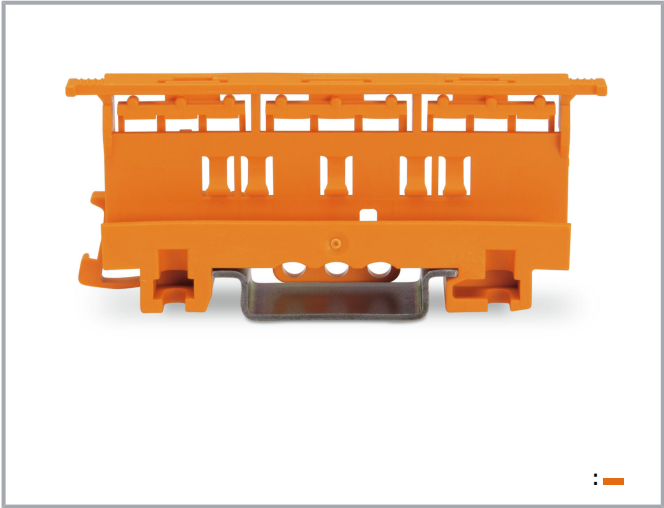

	17.5 mm / 0.689 inch
	77.6 mm / 3.055 inch
Length from upper-edge of DIN-35 rail	25.5 mm / 1.004 inch

	DIN-35
Suitable	for 2-, 3- and 5-conductor 221 Series Splicing Connectors (4 mm²)

	66PA66
UL 94	V0
	9.6 g

/

	BOX
	CN
GTIN	4055143421942
	39269097900

Mounting adapter

	: 222-505 ;; 221 222	www.wago.com/222-505
	: 222-510 ;; 221-500 222-500; DIN -35 ;	www.wago.com/222-510

Marking accessories

	: 210-833 ;; 6 mm;;	www.wago.com/210-833
---	------------------------	--

Documentation

Bid Text

221-500 X81 - Datei	2019219	xml 2.8 kB
221-500 docx - Datei	2019123	docx 14.9 kB

Additional Information

Technical explanations	201943	pdf 2.2 MB
------------------------	--------	---------------

CAD/CAE-Data

CAD data

2D/3D Models 221-500	URL
----------------------	-----

CAE data

EPLAN Data Portal 221-500 /	URL
--------------------------------	-----

ZUKEN Portal 221-500

URL


Environmental Product Compliance

Compliance Search

Environmental Product Compliance 221-500


URL

; 221 - 4 mm²; TS35 / ;

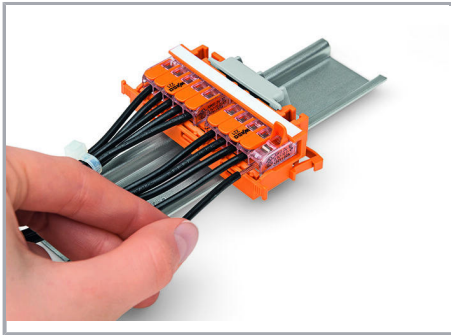


CAGE CLAMP® connection:


Conductor termination with connectors
fitted in a mounting carrier

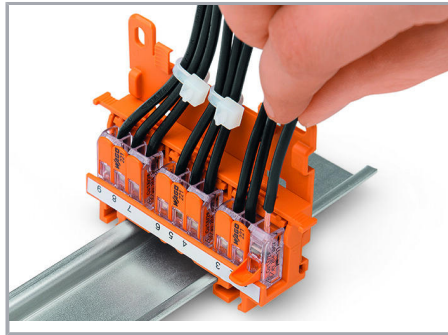


Removing a conductor.

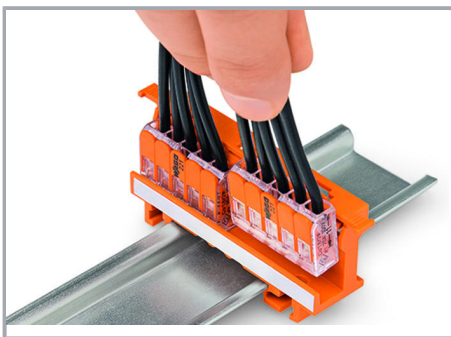

Inserting a connector into the mounting
carrier.

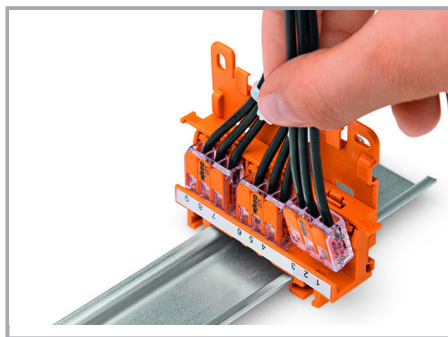


Inserting a connector into the mounting
carrier.

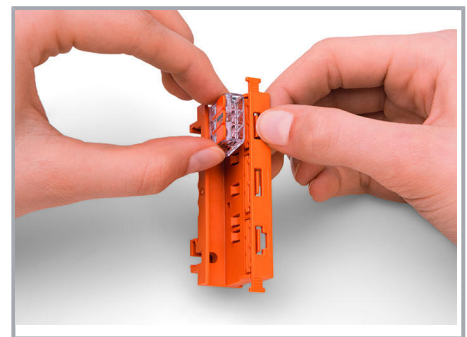


Removing a connector from the mounting
carrier.


/

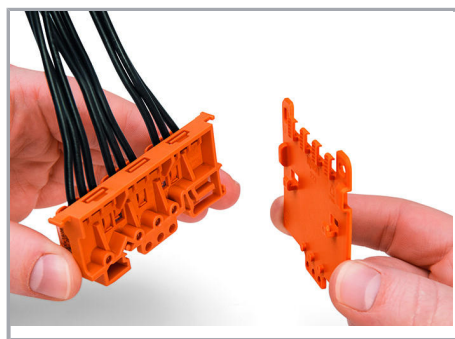


Securing a strain relief plate (222-505) to the mounting carrier.

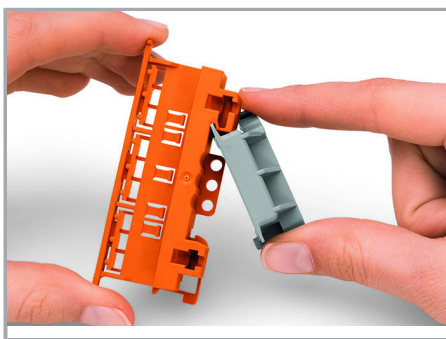


Snapping the angled DIN-rail adapter (222-510) onto the mounting carrier.

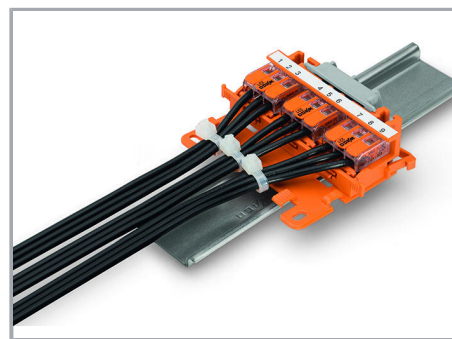

Horizontal mounting on DIN-35 rail using an angled DIN-rail adapter

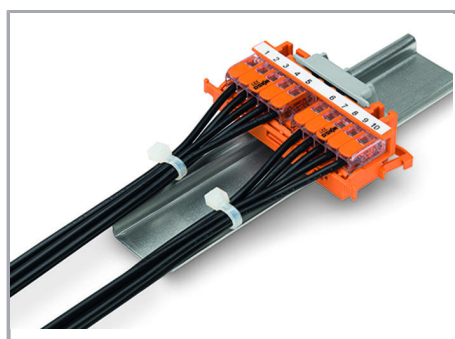


Horizontal mounting on DIN-35 rail using an angled DIN-rail adapter

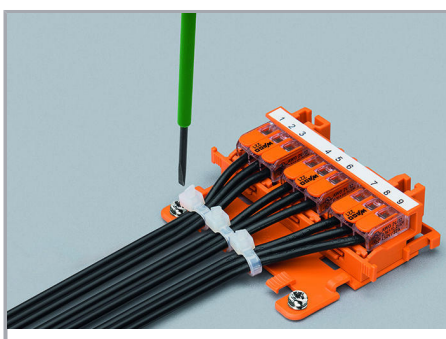


Horizontal screw mounting with strain relief plate on a flat surface




Vertical mounting with strain relief plate on DIN-35 rail

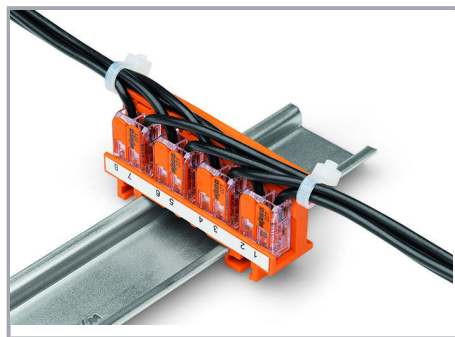

Strain relief via cable ties on the mounting carrier (transverse to the connectors' wiring direction) – clamping units labeled via marking strips (210-334)

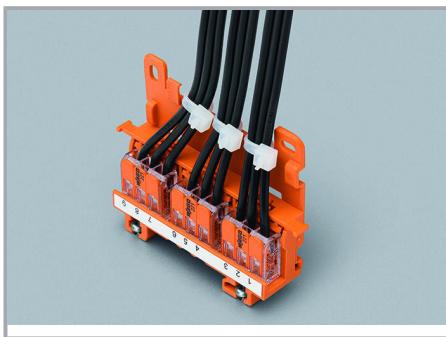


Vertical screw mounting with strain relief plate on a flat surface

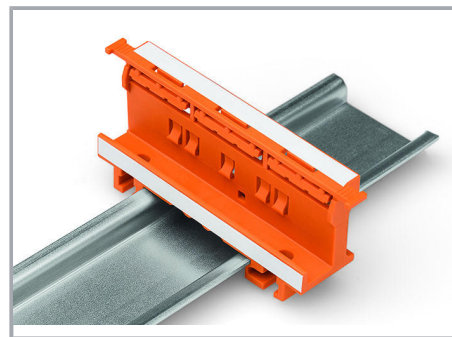

Mounting carrier on a DIN-35 rail

| : 221-500

www.wago.com/221-500

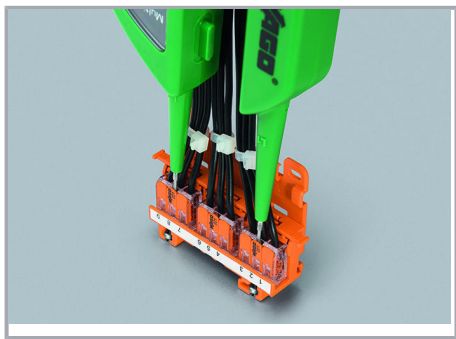

Testing connectors via test slots on top of the carrier.

/

WAGO Contact, Ltd
5F., No.168, Jiankang Rd
Zhonghe City | Taipei County 23585, Taiwan
Tel.: +886 2 22259755 | Fax: +886 2 22251511
Email: info.taiwan@wago.com

+886 2 22250123