
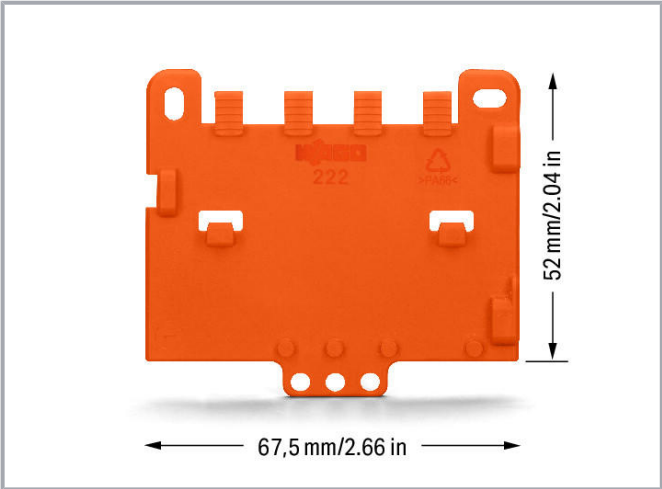


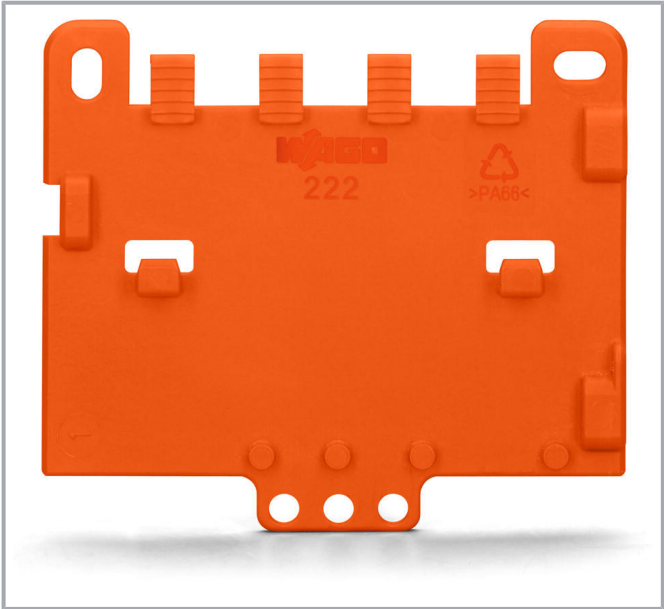

	4 mm / 0.157 inch
	67.5 mm / 2.657 inch
Length from upper-edge of DIN-35 rail	52 mm / 2.047 inch
Suitable	for mounting carriers (221 and 222 Series)
	0.162 MJ
	5.4 g
Product Group	7 (Push Wire Conn.)
	BOX
/	

	DE
GTIN	4045454714789
	85389099990

Mounting adapter

 : 221-500 ; 221 - 4 mm²; TS35 / ;	www.wago.com/221-500
 : 222-500 ; 222; TS35 / ;	www.wago.com/222-500

Documentation

Bid Text

222-505 doc - Datei	2017519	doc 24.1 kB
222-505 X81 - Datei	2019219	xml 2.8 kB

Additional Information

Technical explanations	201943	pdf 2.2 MB
------------------------	--------	---------------

CAD/CAE-Data

CAD data

2D/3D Models 222-505	URL
----------------------	-----

CAE data

WSCAD Universe 222-505	URL
ZUKEN Portal 222-505	URL
EPLAN Data Portal 222-505	URL


/

Environmental Product Compliance


Compliance Search

Environmental Product Compliance 222-505
;; 221 222

URL

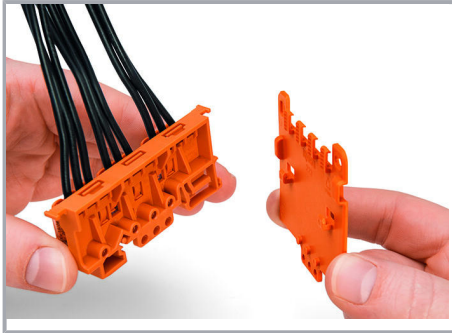

Securing a strain relief plate (222-505) to the mounting carrier.

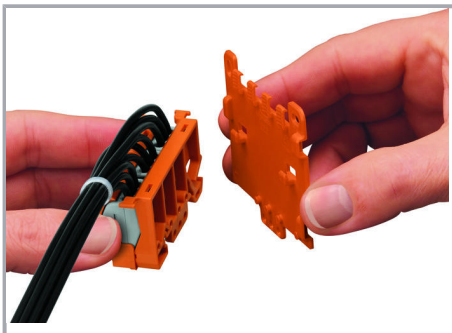

Securing a strain relief plate (222-505) to the mounting carrier.

/