


| : 222-510
; ; 221-500 222-500; DIN -35 ;
www.wago.com/222-510

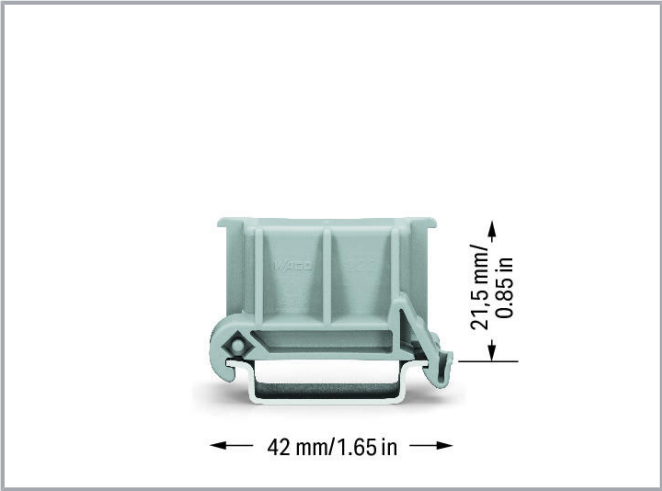

	18.5 mm / 0.728 inch
	42 mm / 1.654 inch
Length from upper-edge of DIN-35 rail	21.5 mm / 0.846 inch
	DIN-35
Suitable	in combination with a mounting carrier (221-500 or 222-500)
	0.118 MJ
	4.4 g

/

WAGO Contact, Ltd
5F., No.168, Jiankang Rd
Zhonghe City | Taipei County 23585, Taiwan
Tel.: +886 2 22259755 | Fax: +886 2 22251511
Email: info.taiwan@wago.com

+886 2 22250123



Product Group	7 (Push Wire Conn.)
	BOX
	CN
GTIN	4045454714802
	39269097900

Mounting adapter

 : 221-500 ; 221 - 4 mm²; TS35 / ;	www.wago.com/221-500
 : 222-500 ; 222; TS35 / ;	www.wago.com/222-500

Documentation

Bid Text

222-510 doc - Datei	2017519	doc 24.1 kB
222-510 X81 - Datei	2019219	xml 2.8 kB

Additional Information

Technical explanations	201943	pdf 2.2 MB
------------------------	--------	---------------

CAD/CAE-Data

CAD data

2D/3D Models 222-510	URL
----------------------	-----

CAE data


EPLAN Data Portal 222-510	URL
WSCAD Universe 222-510	URL
/	

ZUKEN Portal 222-510	URL
----------------------	-----


Environmental Product Compliance

Compliance Search

Environmental Product Compliance 222-510 ;; 221-500 222-500; DIN -35 ;	URL
---	-----

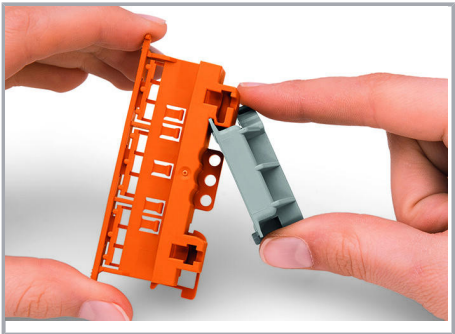

Snapping the angled DIN-rail adapter (222-510) onto the mounting carrier.

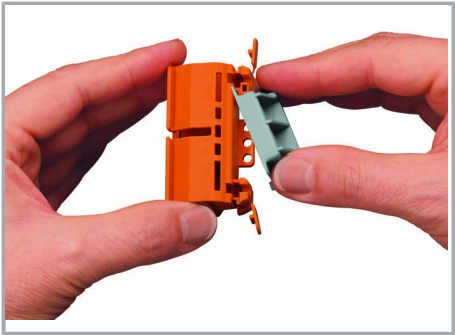

Snapping the angled DIN-rail adapter (222-510) onto the mounting carrier.

/