

CG-P5, CG-PV

用途

0.66kV
樹脂貫穿型
屋內計測用

Usage

0.66kV
Epoxy Resin Molded Window Type
For Indoor Application (Measuring)

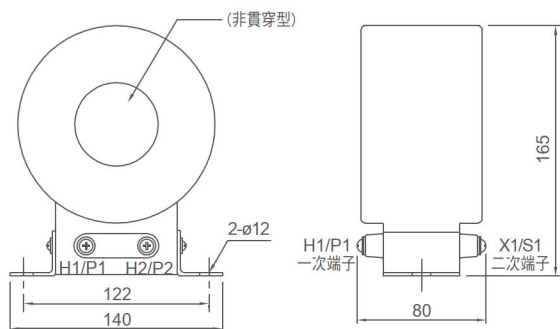


FIG.1 CG-P5 (繞線型)

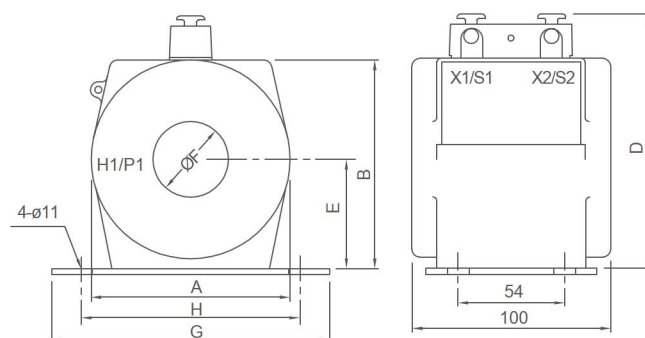


FIG.2 CG-PV



型號 TYPE	一次電流(A) PRI. CURRENT	一次貫 穿導體 數(T)	二次電流(A) SEC. CURRENT	額定負擔/準確度 RATED OUTPUT & ACCURACY CLASS	過電流 強度 -/1s	重量(kg) WEIGHT	圖號 FIG.	外觀尺寸(mm) DIMENSION							
								A	B	D	E	ØF	G	H	
CG-P5 (繞線型)	1, 5 10, 15	—	5 1	15VA / 0.5 15VA / 1.0 40VA / 1.0	40In	4.0	1	—	—	—	—	—	—	—	
CG-PV	20	10	5	15VA / 0.5	40In	3.0	2	100	105	130	55	38	140	110	
	30	6													
	40	5													
	50	4													
	60, 70	3													
	75, 80, 90, 100, 125	2				100	105	130	55	50	140	110			
	150, 175, 200, 225, 250	1													
	300, 400, 500, 600	1													
	700, 800, 900, 1000	1													
	1200, 1500	1													
									</						

依據標準(STANDARD): CNS 11437、IEC 60044-1。使用頻率(FREQUENCY): 50 / 60Hz。
一次貫穿導體由客戶自行捲繞，表列外其它規格請直接和本公司洽詢。