



Residual Current Breaker with Overload

小型漏電斷路器

(RCBO)


■ BHL 系列 訂貨式生產

能滿足電路的接通、分斷及隔離，為電路系統提供短路、過載及 A 型漏電保護。

■ 常見應用

充電設備及充電配電盤。

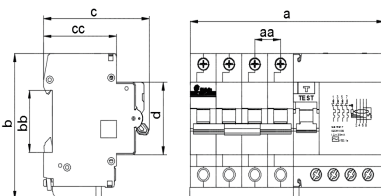

型 名		BHL3			
產品圖示					
極數 (P)		2	3	4	
額定電壓 (VAC)		230/240	400/415	400/415	
額定電流 (A) 基準周圍溫度 30°C		1, 2, 3, 4, 5, 6, 10, 16, 20, 25, 32, 40, 50, 63.			
跳脫特性		C, D TYPE			
啟斷容量 Icn,Ics IEC 61009-1		6kA	6kA	6kA	
額定靈敏度電流 (I Δ n)(mA)		30, 100, 300			
剩餘電流保護類型 (註)		A 型			
外形 及 安裝 尺寸 (mm)		a (寬)	72	117	135
		b (高)	91.5		
		c (深)	73.5		
		aa	18		
		bb	36		
		cc	45.5		

註. 剩餘電流保護類型: Type A ，具備 Type AC 功能及檢測脈動直流功能。

經銷商蓋章處