
Plugs

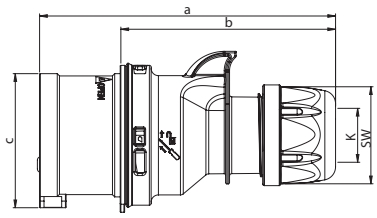


Shark Plug IP44

	16 Amp			32 Amp		
Poles	3	4	5	3	4	5
a	122	128	134	150	150	155
b	86	92	98	104	104	109
c	47	53	61	63	63	70
K_cable Ø [mm]	6-15	6-15	8-16	11,5-20	11,5-20	11,5-22
Connection type:	Screw terminal					
Wire flexible [mm²]	1-2,5			2,5-6		
Contact screws [Ncm]	100 Ncm			110 Ncm		
SW	42	42	42	50	50	50
Weight [g]	109	128	151	181	201	232

- with screw terminals
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a "**v**" e.g. 015-6**v**

IP44 splashproof

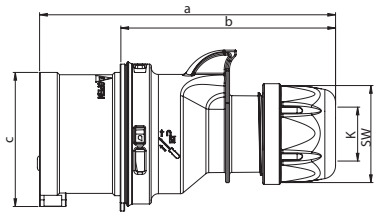


Turbo Shark Plug IP44

	16 Amp			32 Amp		
Poles	3	4	5	3	4	5
a	122	128	134	150	150	155
b	86	92	98	104	104	109
c	47	53	61	63	63	70
K_cable Ø [mm]	6-15	6-15	8-16	11,5-20	11,5-20	11,5-22
Connection type:	Screwless terminal					
Wire flexible [mm²]	1-2,5			2,5-6		
SW	42	42	42	50	50	50
Weight [g]	111	132	156	186	206	241

- screwless connection technology
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a "**v**" e.g. 015-6TT**v**

IP44 splashproof

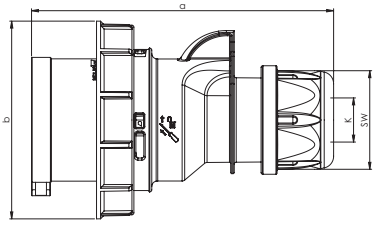


Shark Plug IP67

	16 Amp			32 Amp		
Poles	3	4	5	3	4	5
a	122	128	134	150	150	155
b	71	79	87	93	93	100
K_cable Ø [mm]	6-15	6-15	8-16	11,5-20	11,5-20	11,5-22
Connection type:	Screw terminal					
Wire flexible [mm²]	1-2,5			2,5-6		
Contact screws [Ncm]	100 Ncm			110 Ncm		
SW	42	42	42	50	50	50
Weight [g]	130	154	183	223	242	276

- with screw terminals
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a "**v**" e.g. 0152-6**v**

IP66/67 watertight

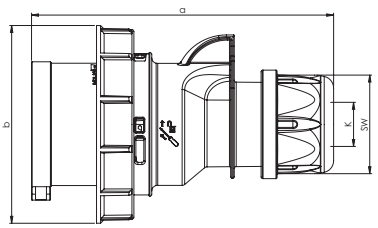

Turbo Shark Plug IP67

	16 Amp			32 Amp		
Polesss	3	4	5	3	4	5
a	122	128	134	150	150	155
b	71	79	87	93	93	100
K_cable Ø [mm]	6-15	6-15	8-16	11,5-20	11,5-20	11,5-22
Connection type:	Screwless terminal					
Wire flexible [mm²]	1-2,5			2,5-6		
SW	42	42	42	50	50	50
Weight [g]	132	157	188	227	246	285

- screwless connection technology
- contacts: brass
  - to order nickel-plated contacts please add a "**v**" e.g. 0152-6TT**v**

IP66/67 watertight


FONLEE 東立自動接制器材有限公司 WWW.FONLEE.COM.TW

Amp.	Poles	pack. unit	110V~ 50/60Hz 4h Cat.No.	230V~ 50/60Hz 3p=6h 4p+5p=9h Cat.No.	400V~ 50/60Hz 3p=9h 4p+5p=6h Cat.No.	500V~ 50/60Hz 7h Cat.No.	>50-500V~ 100-300Hz 10h Cat.No.	>50-500V~ 301-500Hz 2h Cat.No.
16	**3**	10	013-4	**013-6**	013-9	013-7	013-10	013-2
16	**4**	10	014-4	014-9	**014-6**	014-7	014-10	014-2
16	**5**	10	015-4	015-9	**015-6**	015-7	015-10	015-2
32	**3**	10	023-4	**023-6**	023-9	023-7	023-10	023-2
32	**4**	10	024-4	024-9	**024-6**	024-7	024-10	024-2
32	**5**	10	025-4	025-9	**025-6**	025-7	025-10	025-2



015-6

16	**3**	10	013-4TT	**013-6TT**	013-9TT			
16	**4**	10	014-4TT	014-9TT	**014-6TT**			
16	**5**	10	015-4TT	015-9TT	**015-6TT**			
32	**3**	10	023-4TT	**023-6TT**	023-9TT			
32	**4**	10	024-4TT	024-9TT	**024-6TT**			
32	**5**	10	025-4TT	025-9TT	**025-6TT**			



015-6TT

16	**3**	10	0132-4	**0132-6**	0132-9	0132-7	0132-10	0132-2
16	**4**	10	0142-4	0142-9	**0142-6**	0142-7	0142-10	0142-2
16	**5**	10	0152-4	0152-9	**0152-6**	0152-7	0152-10	0152-2
32	**3**	10	0232-4	**0232-6**	0232-9	0232-7	0232-10	0232-2
32	**4**	10	0242-4	0242-9	**0242-6**	0242-7	0242-10	0242-2
32	**5**	10	0252-4	0252-9	**0252-6**	0252-7	0252-10	0252-2



0152-6

16	**3**	10	0132-4TT	**0132-6TT**	0132-9TT			
16	**4**	10	0142-4TT	0142-9TT	**0142-6TT**			
16	**5**	10	0152-4TT	0152-9TT	**0152-6TT**			
32	**3**	10	0232-4TT	**0232-6TT**	0232-9TT			
32	**4**	10	0242-4TT	0242-9TT	**0242-6TT**			
32	**5**	10	0252-4TT	0252-9TT	**0252-6TT**			




0252-6TT

FONLEE 豐立自動控制器材有限公司 WWW.FONLEE.COM.TW

Plugs

Power Twist Plug IP44

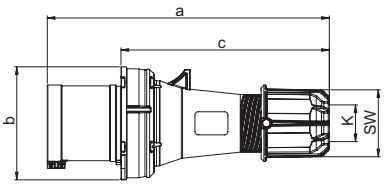


	63 Amp		
Poles	3	4	5
a	257	257	257
b	102	102	102
c	190	190	190
K_cable Ø [mm]	14,5-36	14,5-36	14,5-36
Connection type:	Contact frame with screws		
Wire flexible [mm²]	6-16		
Contact screws [Ncm]	200 Ncm		
SW	61	61	61
Weight [g]	530	572	621

- contact frame with screws
- housing material: PA6
- contacts: nickel-plated contacts with pilot contact (see page 10)

IP44 splashproof

Power Twist Plug IP66/67

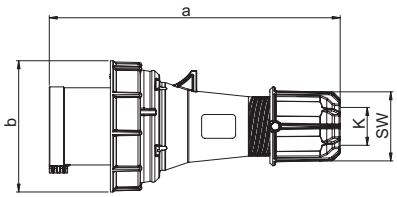


	63 Amp		
Poles	3	4	5
a	257	257	257
b	114	114	114
K_cable Ø [mm]	14,5-36	14,5-36	14,5-36
Connection type:	Contact frame with screws		
Wire flexible [mm²]	6-16		
Contact screws [Ncm]	200 Ncm		
SW	61	61	61
Weight [g]	570	617	666

- contact frame with screws
- housing material: PA6
- contacts: nickel-plated contacts with pilot contact (see page 10)

IP66/67 watertight

Power Twist Plug IP66/67

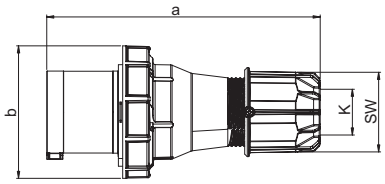

	125 Amp		
Poles	3	4	5
a	270	270	270
b	131	131	131
K_cable Ø [mm]	22,5-50	22,5-50	22,5-50
Connection type:	Contact frame with screws		
Wire flexible [mm²]	16-50		
Contact screws [Ncm]	450 Ncm		
SW	81	81	81
Weight [g]	956	1064	1169

- contact frame with hexagon socket screws
- housing material: PA6
- contacts: nickel-plated contacts with pilot contact (see page 10)

IP66/67 watertight



Safety


High impact resistance

Optimum grip

Large connection area

Time saving

Amp.	Poles	pack. unit	110V~ 50/60Hz 4h Cat.No.	230V~ 50/60Hz 3p=6h 4p+5p=9h Cat.No.	400V~ 50/60Hz 3p=9h 4p+5p=6h Cat.No.	500V~ 50/60Hz 7h Cat.No.	>50-500V~ 100-300Hz 10h Cat.No.	>50-500V~ 301-500Hz 2h Cat.No.
63	**3**	2	0331-4	**0331-6**	0331-9	0331-7	0331-10	0331-2
63	**4**	2	0341-4	0341-9	**0341-6**	0341-7	0341-10	0341-2
63	**5**	2	0351-4	0351-9	**0351-6**	0351-7	0351-10	0351-2



0351-6

Amp.	Poles	pack. unit	110V~ 50/60Hz 4h Cat.No.	230V~ 50/60Hz 3p=6h 4p+5p=9h Cat.No.	400V~ 50/60Hz 3p=9h 4p+5p=6h Cat.No.	500V~ 50/60Hz 7h Cat.No.	>50-500V~ 100-300Hz 10h Cat.No.	>50-500V~ 301-500Hz 2h Cat.No.
63	**3**	2	033-4	**033-6**	033-9	033-7	033-10	033-2
63	**4**	2	034-4	034-9	**034-6**	034-7	034-10	034-2
63	**5**	2	035-4	035-9	**035-6**	035-7	035-10	035-2



035-6


Amp.	Poles	pack. unit	110V~ 50/60Hz 4h Cat.No.	230V~ 50/60Hz 3p=6h 4p+5p=9h Cat.No.	400V~ 50/60Hz 3p=9h 4p+5p=6h Cat.No.	500V~ 50/60Hz 7h Cat.No.	>50-500V~ 100-300Hz 10h Cat.No.	>50-500V~ 301-500Hz 2h Cat.No.
125	**3**	2	043-4	**043-6**	043-9	043-7	043-10	043-2
125	**4**	2	044-4	044-9	**044-6**	044-7	044-10	044-2
125	**5**	2	045-4	045-9	**045-6**	045-7	045-10	045-2



045-6

Time saving:

- Simple and fast insertion of the cable
- Strain-relief and sealing of the cable by tightning the cable gland
- All current cables
  for 63A from ø14,5mm to ø36mm
  for 125A from ø22,5mm to ø50mm
- 100% Tightness of the cable

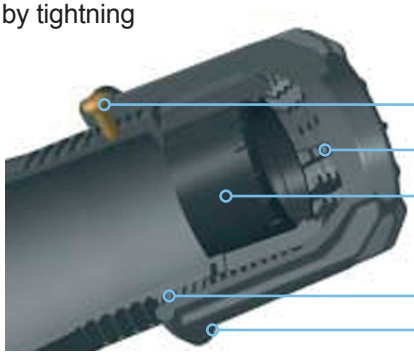

- **Safety screw**
  locks the screw cap in position
- **Strain-relief**
  for very high strain
- **Sealing**
  protection degree IP66/IP67
- **Acme thread**
  for high force
- **Cable gland nut**
  optimum grip