

0512 KSS 插鞘式固定座 PUSH TIE MOUNT










單位：mm



型號 Item No.	帶孔 W1	適用孔徑 Mounting Hole	基板厚度 Thickness	包裝 Packing
PHC-4	3.8	4.8	0.5~1.6	100pcs
PHC-5	5.0	7.0	1.6~4.0	
PHC-5A	5.0	6.3	3.2	
PHC-5L	5.0	7.0	1.6~4.0	
PHC-6.5	6.5	如圖	3.2	
PHC-8	8.1	6.2	0.5~1.2	
PHC-9	9.4	如圖	2.0	
PHC-1105	11.0	如圖	0.5~1.2	
PHC-1509	7.8	6.0	2.0	

材質：UL合格之NYLON 66 (本色)，防火等級 94V-2。
用法：將基板鑽孔，再將插鞘式固定座插入基板，再以紫線帶固定電線。

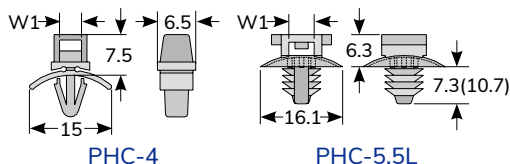

0513 KSS 紫線帶連結固定座 TWIN TIE DEVICE





單位：mm



型號 Item No.	尺寸 Dimension				包裝 Packing
	L	W	W1	H	
DH-10	21.3	13.9	9.3	9.3	100pcs
DH-11	21.3	15.0	10.5	9.3	
DH-16	20.8	21.4	17.5	8.7	
DH-20	20.8	25.4	21.5	8.7	

材質：UL合格之NYLON66 (黑色)，防火等級94V-2。
用法：將兩條紫線帶穿過矩形孔(W1處)，能使電線固定於柱子或管子上。



配線槽

配線標誌

紫線帶

結束帶

固定座

固定頭、浪管

保護部品

接線頭

套管

固定夾

PC板部品

扣具