




0220 KSS N型配線標誌 N TYPE CABLE MARKER




型號 Item No.	適用電線 Suitable Wire		規格 Size mm			號碼種類 Std. Markings	包裝 Packing
	sq	mm	L	I.D.	Ø2		
VS-1	0.12~0.3	0.95~1.3	2.3	0.9	1.7	0,1,2,...,9 A,B,C,...,Z +,-	每支 30個裝
S-1	0.5	1.9~2.2	3.0	1.8	2.8		
N-1	0.75~1.25	2.8~3.4	3.0	2.7	3.9		
N-2	2.0~3.5	3.4~4.6	3.0	3.2	4.6		
N-3	3.5~5.5	4.6~5.9	3.0	4.4	5.8		

材質：NYLON 66 (白色)。

用法：將喇叭口合於電線 (如左圖)，再用手指推擠標誌，使標誌滑到電線上牢牢夾住。



0225 KSS OC型配線標誌 OC TYPE CABLE MARKER

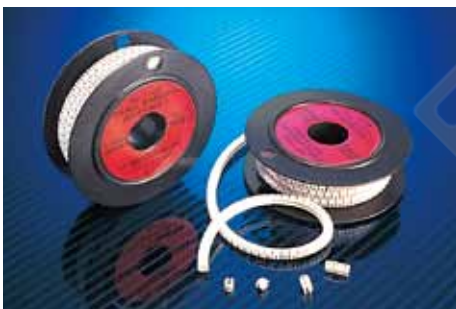

型號 Item No.	適用電線 Suitable Wire		I.D. 適用範圍 mm	長 L mm	號碼種類 Std. Markings	包裝 Packing
	sq	AWG				
OC-1	0.5~0.75	20~18	2.5~3.0	4	0~9, A~Z /,+,-,*,空白 (特殊符號接受訂製)	每捲 1000pcs
OC-2	1.25~2.0	16~14	3.2~3.6			
※ OC-2L	1.25~2.0	16~14	3.2~3.6			
OC-3	3.5~5.5	12~10	4.2~5.1			
OC-4	5.5~8.0	10~8	5.1~6.2			
OC-8	14	6	7.5~8.0	6.0		每捲 500pcs 每捲 300pcs

材質：UL合格之南亞PVC (白色)，防火等級美規94V-0及歐規M1，PVC耐溫85°C。

用法：線路配妥后再行嵌入即可。使用一種規格能適用兩種規格之電線。

※OC-2L開口較大

