



0615 KSS 簡易型浪管固定頭 FLEXIBLE CONDUIT ADAPTOR




單位：mm




型號 Item No.	螺紋外徑 Thread O.D.	鐵板孔徑 Mounting Hole	接頭種類 TYPE	適用浪管 Suitable Conduit	包裝 Packing
FAM-18			浪管-浪管中間接頭	BG-18P 3分 (3/8")	20pcs
FAM-22				BG-22P 4分 (1/2")	
FAM-26				BG-26P 6分 (3/4")	
FAM-34				BG-34P 1吋 (1")	
FAB-18	17.0	17.0+0.2	浪管-接線盒接頭 (如需螺帽請另購)	BG-18P 3分 (3/8")	
FAB-22	20.0	20.0+0.2		BG-22P 4分 (1/2")	
FAB-26	24.0	24.0+0.3		BG-26P 6分 (3/4")	
FAB-34	32.5	32.5+0.3		BG-34P 1吋 (1")	
FAP-18			浪管-PVC管接頭	BG-18P 3分 (3/8")	
FAP-22				BG-22P 4分 (1/2")	
FAP-26				BG-26P 6分 (3/4")	
FAP-34				BG-34P 1吋 (1")	

材質：UL合格之ABS (灰色)，防火等級94HB。
特點：方便連接，節省工時。

0620 KSS 浪管 FLEXIBLE CONDUIT

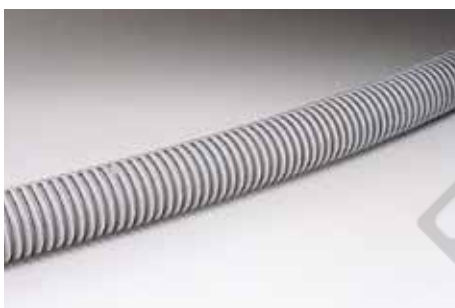

材質：高密度 PE (灰色)，備有EVA材質。
用途：適用於電纜之保護，可代替 PVC塑膠管。
● 另備有黑色，歡迎來電洽詢。

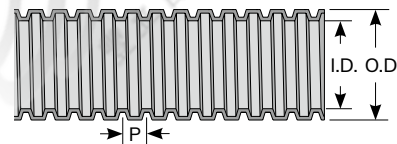

● 密封型

單位：mm

型號 Item No.	內徑 I.D.	外徑 O.D.	P	適用固定頭	包裝 Packing
BG-10P	7.4±0.4	10.2±0.4	2.6±0.3	BG-10	300M
BG-14P	10.7±0.4	14.1±0.4	2.6±0.3	BG-14	
BG-16P	10.7±0.4	16.0±0.4	3.2±0.4	BG-16, BGQ-16	
BG-18P (3分)	13.8±0.4	17.5±0.4	3.2±0.4	BG-18, BGQ-18	
BG-20P	14.1±0.4	20.0±0.4	3.8±0.4	BG-20, BGQ-20	100M
BG-22P (4分)	17.2±0.4	22.0±0.4	3.2±0.4	BG-22, BGQ-22	
BG-25P	18.3±0.4	25.0±0.4	4.3±0.4	BG-25, BGQ-25	
BG-26P (6分)	21.2±0.4	25.8±0.4	3.2±0.4	BG-26, BGQ-26	
BG-32P	24.3±0.4	32.0±0.4	5.0±0.5	BG-32, BGQ-32	50M
BG-34P (1吋)	28.7±0.4	34.0±0.4	3.2±0.4	BG-34, BGQ-34	
BG-40P	31.2±0.4	40.0±0.4	5.8±0.5	BG-40	
BG-42P (1吋2)	34.9±0.4	42.0±0.4	3.2±0.4	BG-42	
BG-48P (1吋半)	40.0±0.5	48.0±0.5	4.6±0.4	BG-48	
BG-50P	39.6±0.5	50.0±0.5	7.4±0.6	BG-50	
BG-55P (歐規2吋)	47.5±0.4	54.5±0.5	3.2±0.4		30M
BG-60P (2吋)	52.0±0.5	60.0±0.5	6.2±0.5		
BG-76P (2吋半)	62.0±0.5	76.0±0.5	6.2±0.5		

配線槽
配線標誌
紮線帶
結束帶
固定座
固定頭、浪管
保護部品
接線頭
套管
固定夾
PC板部品
扣具