

H3Y-2/2L/4 H3Y-2□/2L□/4□ H3Y-2V□/2LV□/4V□




With Y-20

- 內置專用CMOS IC，具高信賴度及穩定度
- 由1秒至60小時，提供6種時間範圍可供客戶選擇(H3Y-2□/-2V□, H3Y-2L□/-2LV□, H3Y-4□/-4V□)
- 閃爍繼電器功能可由DIP開關選擇(H3Y-2□/-2V□, H3Y-2L□/-2LV□, H3Y-4□/-4V□)
- 使用雙色LED，可清楚指示電源接通及時間到指示
- 提供0.1sec至60hrs時間範圍可供客戶選擇(H3Y-2, H3Y-2L, H3Y-4)
- 直流交流共用，電壓範圍AC/DC 100~240V(H3Y-2V□, H3Y-2LV□, H3Y-4V□)
- 使用接合器(Type Y-20)即可將標準露出安裝型轉變為埋入安裝型

規格


尺寸(mm)		28H×22W×55D		
型號		H3Y-2/H3Y-2L/H3Y-4	H3Y-2□/-2L□/-4□	H3Y-2V□/-2LV□/-4V□
時間範圍		SEC : 1, 3, 6, 10, 30, 60 MIN : 3, 6, 10, 30, 60 H R : 3, 6, 10, 30, 60	A: 1S, 10S, 1M, 10M B: 3S, 30S, 3M, 30M C: 6S, 60S, 6M, 60M D: 1M, 10M, 1H, 10H E: 3M, 30M, 3H, 30H F: 6M, 60M, 6H, 60H	A: 1S, 10S, 1M, 10M B: 3S, 30S, 3M, 30M C: 6S, 60S, 6M, 60M D: 1M, 10M, 1H, 10H E: 3M, 30M, 3H, 30H F: 6M, 60M, 6H, 60H
額定電壓		DC(V):12, 24, 48, 110 AC(V):12, 24, 48, 110, 220, 240 50/60Hz		AC/DC(V):100~240 50/60Hz
指示燈動作		ON-綠燈 UP-紅燈		
輸出接點	型號	H3Y-2/H3Y-2□/2V□	H3Y-2L/-2L□/-2LV□	H3Y-4/H3Y-4□/4V□
	限時1C			
	限時2C	5A 250VAC 電阻性負載	10A 250VAC 電阻性負載	5A 250VAC 電阻性負載(4C)
	瞬時1C			
壽命	機械	5×10 ⁶ times		
	電氣	10 ⁵ times		
復歸時間		0.1 sec max		

接線圖與時序圖

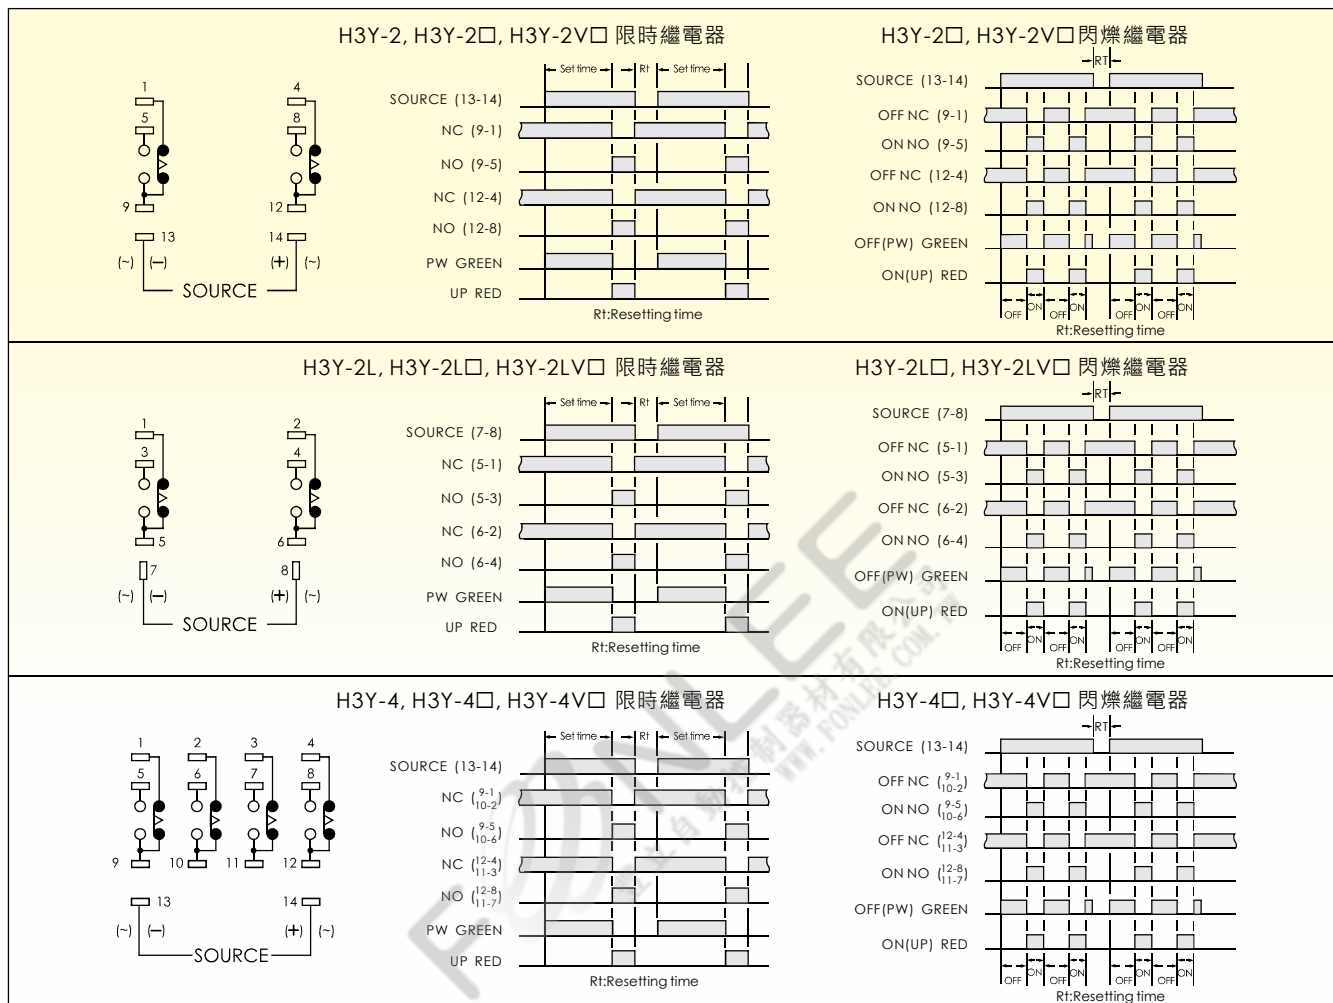

外觀尺寸圖

露出型 (N型) : 使用PYF08A,PYF08A-E,PTF08A,PTF08A-E,PYF14A,PYF14A-E底座

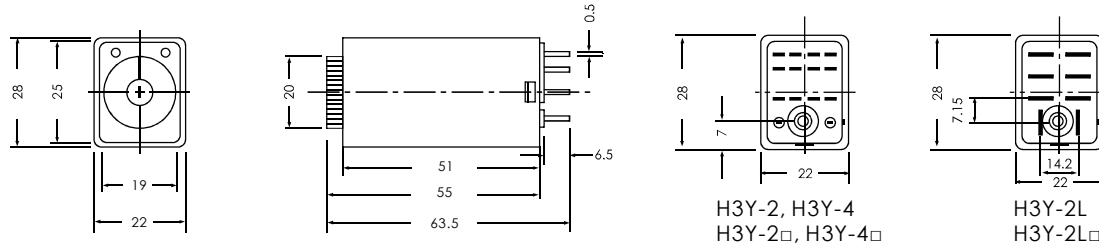

埋入型 (Y型) : 使用Y-20接合器+PYF08A,PYF08A-E,PTF08A,PTF08A-E,PYF14A,PYF14A-E底座

