


五、低壓乾式變壓器

Low Voltage Dry Type Transformer

3Ø 60Hz 無外箱 IP00 (Three Phase 60Hz Without Enclosure)

額定Rated				外形尺寸Dimension(mm)					重量 Weight (kg)
容量 Capacity (kVA)	高壓側 High Voltage (V)	低壓側 Low Voltage (V)	阻抗電壓 Impedance Voltage (%)	H	L	W	E	F	
3	480 460 440 380 220	220 110 380Y/220 220Y/127 208Y/120 200Y/115 199Y/115 190Y/110	≤4.5	320	320	260	200	190	35
5				375	320	260	200	190	40
7.5				400	320	260	200	190	50
10				385	375	300	250	230	70
15				430	375	300	250	230	80
20			3.0~5.5	510	375	300	250	230	95
25				530	415	300	250	230	120
30				525	530	340	300	270	135
37.5				555	530	340	300	270	150
50				575	590	400	400	300	200
75				700	640	400	450	300	250
100				880	800	450	550	350	370
150				1050	800	450	550	350	450
200				1030	980	550	650	450	600
250				1090	980	550	650	450	690

外形尺寸 | Diagram of Dimensions

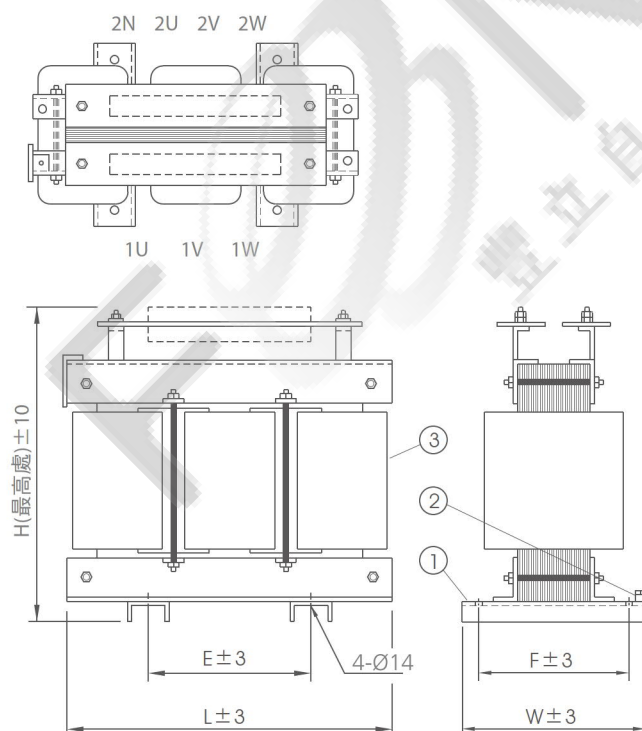

表一

容量 Capacity	噪音基準 Sound Level
0-50 kVA	50 dBa
51-150 kVA	55 dBa
151-250 kVA	58 dBa

產品規格 | Product Specification

1. 依據標準：IEC 60076-11、CNS13390
 2. 絕緣耐熱等級：H (180°C)
 3. 線圈溫升：125K
 4. AC.耐壓：3kV
 5. 噪音值：如(表一)
1. Standard: IEC 60076-11、CNS13390
 2. Insulation thermal Class: H (180°C)
 3. Coil Temperature Rise: 125K
 4. AC. Withstand Voltage: 3kV
 5. Noise Level: According to table 1.


※依容量、結線不同變壓器端子出線及結構將有所改變，因此以上外形僅供參考。(外形尺寸不變)

According to the difference of capacity and connection, terminal and structure would be changed. Therefore, the outline of transformer is for reference only (Nevertheless, the dimension won't be changed).

3Ø 60Hz 附外箱IP20 (Three Phase 60Hz With Enclosure)

額定Rated				外形尺寸Dimension(mm)					重量 Weight (kg)
容量 Capacity (kVA)	高壓側 High Voltage (V)	低壓側 Low Voltage (V)	阻抗電壓 Impedance Voltage (%)	H	L	W	E	F	
3	480 460 440 380 220	220 110 380Y/220 220Y/127 208Y/120 200Y/115 199Y/115 190Y/110	≤ 4.5	495	370	250	320	150	47
5				495	370	250	320	150	50
7.5				520	370	250	320	150	60
10				510	435	300	385	200	85
15				560	435	300	385	200	100
20				635	435	300	385	200	110
25				690	475	350	425	250	135
30				715	595	350	545	250	165
37.5			3.0~5.5	715	595	350	545	250	180
50				780	660	400	400	300	230
75				895	710	450	450	350	300
100				1100	880	450	550	350	430
150				1280	880	450	550	350	510
200				1355	1050	600	650	500	690
250				1415	1080	600	650	500	780

外形尺寸 | Diagram of Dimensions

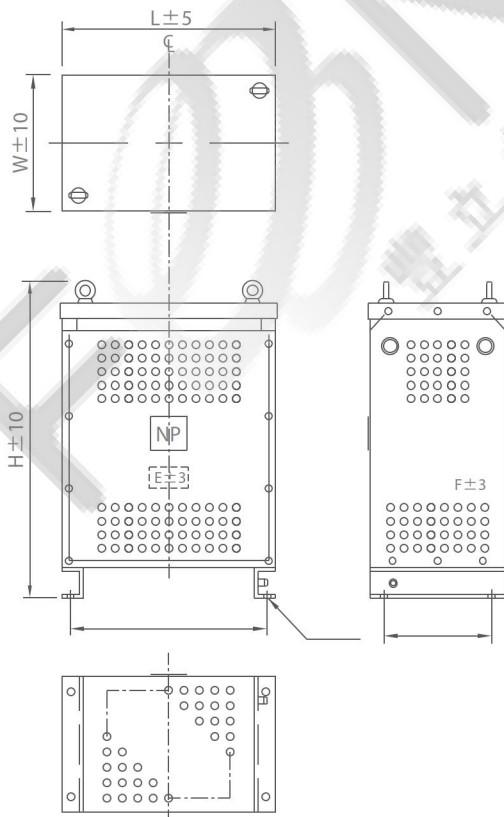

表一

容量 Capacity	噪音基準 Sound Level
0-50 kVA	50 dBa
51-150 kVA	55 dBa
151-250 kVA	58 dBa

產品規格 | Product Specification

1. 依據標準：IEC 60076-11、CNS13390
 2. 絕緣耐熱等級：H (180°C)
 3. 線圈溫升：125K
 4. AC.耐壓：3kV
 5. 噪音值：如(表一)
1. Standard: IEC 60076-11、CNS13390
 2. Insulation thermal Class: H (180°C)
 3. Coil Temperature Rise: 125K
 4. AC. Withstand Voltage: 3kV
 5. Noise Level: According to table 1.

※依容量、結線不同變壓器端子出線及結構將有所改變，因此以上外形僅供參考。(外形尺寸不變)

According to the difference of capacity and connection, terminal and structure would be changed. Therefore, the outline of transformer is for reference only (Nevertheless, the dimension won't be changed).