

CG-PVB

用途

0.66kV
樹脂貫穿型
屋內計測用

Usage

0.66kV
Epoxy Resin Molded Window Type
For Indoor Application (Measuring)

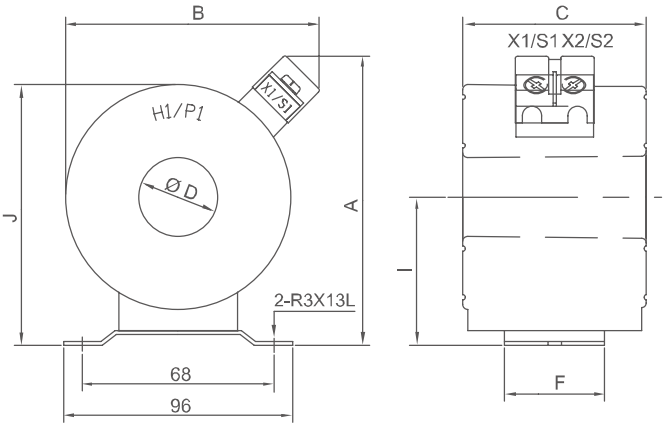


FIG.1 CG-PVB

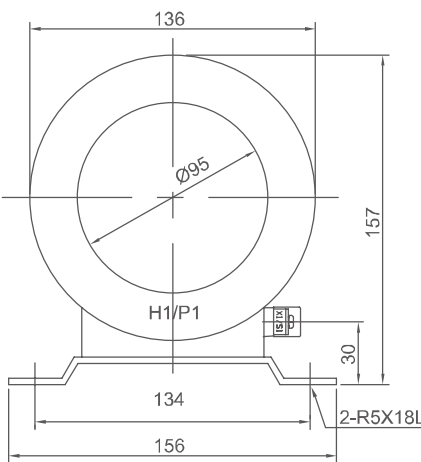


FIG.2 CG-PVB

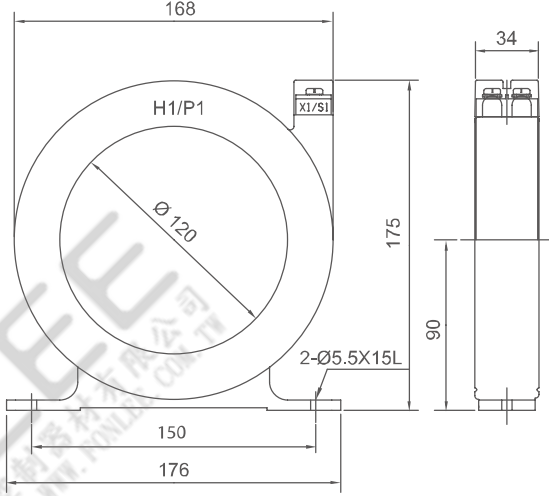


FIG.3 CG-PVB

型號 TYPE	一次電流(A) PRI. CURRENT	一次貫穿導體數(T)	二次電流(A) SEC. CURRENT	額定負擔/準確度 RATED OUTPUT & ACCURACY CLASS	過電流強度 -/1s	重量(kg) WEIGHT	圖號 FIG.	外觀尺寸(mm) DIMENSION							
								A	B	C	ØD	F	I	J	
CG-PVB	5	36	5	20VA / 1.0 40VA / 1.0	40In	1.7	1	112	92	77	32	30	63	110	
	10	18													
	15	12													
	20	10													
	25	8													
	30	6													
	40	5													
	50	4													
	60	3													
	75	2													
	100, 125,	2													
	150, 175, 180, 200, 225, 250, 300, 350	1													
400, 500, 600	1	1.0	1	121	106	63	52	42	63	110					
700, 750, 800, 1000, 1200, 1400, 1500	1	5	40VA / 1.0	40In	1.2	2	—	—	—	—	—	—			
1600, 1700, 1800, 2000, 2500, 2600, 3000, 3200, 3500	1	5	40VA / 1.0	40In	1.2	3	—	—	—	—	—	—			

依據標準(STANDARD)：CNS 11437、IEC 60044-1。使用頻率(FREQUENCY)：50 / 60Hz。
一次貫穿導體由客戶自行捲繞，表列外其它規格請直接和本公司洽詢。