

CMD-2SV

用途

24kV
樹脂鑄造
屋內計測 & 保護用



Usage

24kV
Epoxy Resin Molded
For Indoor Application
(Measuring & Protective)

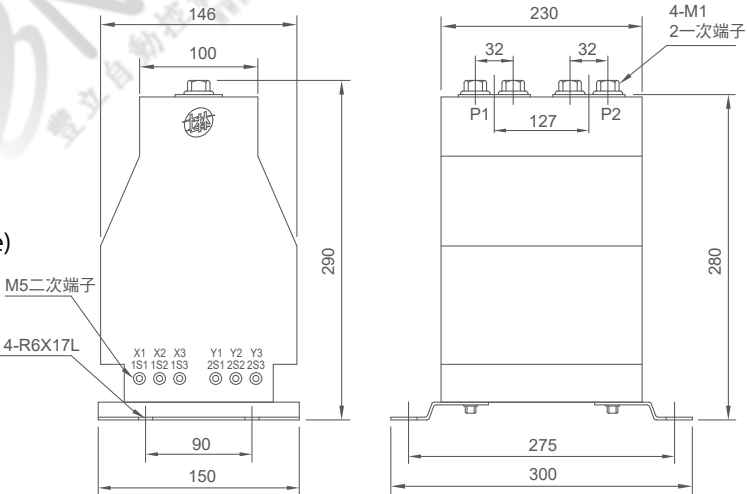


FIG.2 CMD-2SV

型號 TYPE	一次電流(A) PRI. CURRENT	二次電流(A) SEC. CURRENT	額定負擔/準確度 RATED OUTPUT & ACCURACY CLASS	過電流 強度 - /1s	重量(kg) WEIGHT	外觀尺寸 (mm) DIMENSION
CMD-2SV 單比 雙鐵心 SINGLE RATIO	5, 10, 20, 25, 30, 40, 50, 60, 75, 80, 100, 120, 150, 200, 250	5 / 5	15VA-1.0 / 15VA-5P20 15VA-1.0 / 15VA-10P20 30VA-1.0/15VA-5P20 30VA-1.0/15VA-10P20	40In	20	FIG.2
	300, 350, 400, 500, 600, 700, 750, 800, 1000			25kA		
CMD-2SV 雙比 雙鐵心 DOUBLE RATIO	10-5, 20-10, 30-15, 40-20, 50-25, 60-30, 80-40, 100-50, 120-60, 150-75, 200-100, 250-125			40In		
	300-150, 400-200, 500-250, 600-300, 800-400, 1000-500			25kA		

依據標準 (STANDARD) : CNS 11437、IEC 60044-1。使用頻率 (FREQUENCY) : 50 / 60Hz
表中二次電流、負擔、準確度之標示意義為：量測值／保護值，表列外其它規格與倍數請直接和本公司洽詢